

Test Report

Name of products: MCCB

Type: BA5731-125

Applicant: WENZHOU HUAJIA ELECTRICAL EQUIPMENT CO., LTD

Kind of test: Commission test



DEKRA Testing Services (Zhejiang) Co., Ltd

Test Report

Project No.	3307644	Trade mark	/	
Name of Product	MCCB	Type	BA5731-125	
Rated parameters	Ue = 400 Vac, In = 100 A, Icu = 25 kA		Pole number	3P
Applicant	Name	WENZHOU HUAJIA ELECTRICAL EQUIPMENT CO., LTD		
	Address	No.311, LATITUDE FIFTEEN ROAD, YUEQING ECONOMIC DEVELOPMENT ZONE, YUEQING ZHEJIANG, CHINA, 325600		
Manufacturer	Name	WENZHOU HUAJIA ELECTRICAL EQUIPMENT CO., LTD		
	Address	No.311, LATITUDE FIFTEEN ROAD, YUEQING ECONOMIC DEVELOPMENT ZONE, YUEQING ZHEJIANG, CHINA, 325600		
Quantity of samples	1	Contact Person	Huang Guangfa	Date of sample available 2015-03-24
Testing Location (if different from KEMA Lab)	Testing Lab	/		
	Address	/		
Test requirements	IEC 60947-2:2006			
Test duration	2015-03-24 to 2015-03-25			
Test result	Pass		Issue date	2015-3-26
Remarks	/			
Tested by	<i>Day</i>	Reviewed by	<i>Jane</i>	Tested by <i>Louis</i>



Product Description

1. Name and type of product:

MCCB, BA5731-125

2. Primary technical parameters:


$U_e = 400 \text{ Vac}$, $I_n = 100 \text{ A}$, $I_{cu} = 25 \text{ kA}$, 3P

3. Photograph of the product:

3.1 Copy of the marking plate:

/

3.2 Copy of shape of the products:

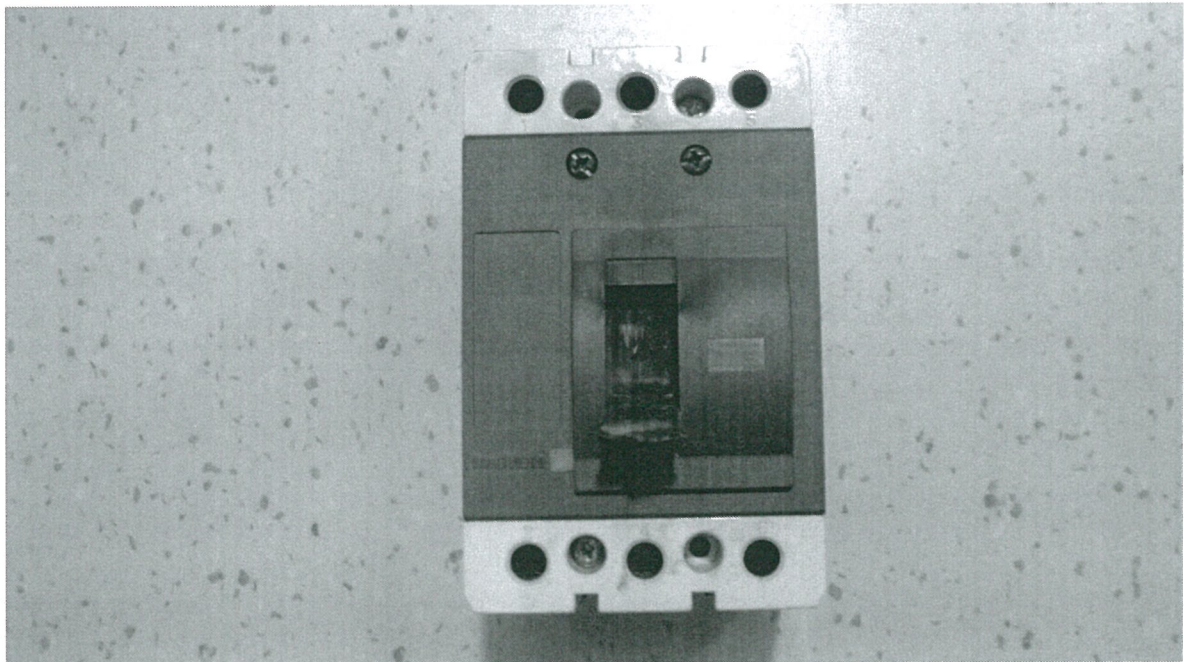

4. Test remarks

/

5. General remark:

The meaning for all the symbols used in this report:

'P': Test object does meet the standards and/or applicant's requirement;

'F': Test object does not meet standards and/or applicant's requirement;

'/': For description: not applicable or the information is not required or not provided by the applicant;

For test verdict: test case does not apply to the test object or just part of items conducted in the specified test program;

'-': Test case is not conducted as some tests in the sequence have failed already.

Summary of Test

Sequence	Test Item	Clause	Result
Seq.III	Verification of overload releases	8.3.5.1	P
	Rated ultimate short-circuit breaking capacity	8.3.5.2	P
	Verification of dielectric withstand	8.3.5.3	P
	Verification of overload releases	8.3.5.4	P
/			

Clause	Requirement - test	Results-Remarks	Verdict
--------	--------------------	-----------------	---------

8.3.5	TEST SEQUENCE III (Icu)		P
	Type designation or serial number	BA5731-125	
	Sample no:	1#	
	Rated current: In (A)	100 A	
	Rated operational voltage: Ue (V)	400 Vac	
	Rated ultimate short-circuit breaking capacity: (kA)	25 kA	
8.3.5.1	The operation of overload releases shall be verified at twice the value of their current setting on each pole separately.		
	Test current: (A)	200 A	
	The operating time shall not exceed the max. value stated by the manufacturer for twice the current setting at the reference temperature, on a pole singly.		
	Time specified by the manufacturer:	$30\text{ s} \leq t \leq 150\text{ s}$	P
	- Operation time: (s)L1:	96 s	P
L2:	128 s	
L3:	90 s	
8.3.5.2	Test of rated ultimate short-circuit breaking capacity		
	The test sequence of operations is O – t - CO		
	Test made in free air:		P
	Circuit is earthed at: (load-star- or supply-star point)	supply-star point	P
	Conductor cross-sectional area (mm ²) :	35 mm ²	P
	- test voltage U/Ue = 1,05 (V)	426,8 Vac	P
	- r.m.s. test current AC/DC: (kA).....	25,4 kA	P
	power factor/time constant : 0,20~0,25	0,24	P
	- peak test current (kAmax) :	51,9 kA	P
	Test sequence "O"		
	- max. let-through current: (kApeak).....	18,0 kA	P

Clause	Requirement - test	Results-Remarks	Verdict
	- Joule integral I^2dt (kA ² s)L1:L2:L3:	54,0 kA ² s 575,8 kA ² s 919,6 kA ² s	P
	Pause, t: (min)	3 min	P
	Test sequence "CO"		
	- max. let-through current: (kA _{peak})	17,0 kA	P
	- Joule integral I^2dt (kA ² s)L1:L2:L3:	856,8 kA ² s 671,6 kA ² s 234,9 kA ² s	P
	Melting of the fusible element	No melting	P
	Holes in the PE-sheet for test sequence "O"	No holes	P
	Cracks observed	No cracks	P
8.3.5.3	Verification of dielectric withstand		
	- equal to twice the rated operational voltage with a minimum of 1000 V for 60 seconds	1000 V, 60 s	P
	- In all normal positions of operation, all the terminals of the main circuit and enclosure or mounting plate. - Between the incoming and outgoing terminals.	no breakdown and flashover	P
	- the leaking current for circuit-breaker suitable for isolation: (<6mA / 1,1 U _e)	440 V	P
L1:L2:L3:	0,029 mA 0,184 mA 0,149 mA	P
8.3.5.4	Verification of overload releases		
	The operation of overload releases shall be verified at 2,5 times the value of their current setting on each pole separately.		
	Test current: (A)	250 A	
	The operating time shall not exceed the max. value stated by the manufacturer for twice the current setting at the reference temperature, on a pole singly.		

Clause	Requirement - test	Results-Remarks	Verdict
--------	--------------------	-----------------	---------

	Time specified by the manufacturer:	t ≤ 150 s	P
	- Operation time: (s)L1: L2: L3:	73 s 109 s 62 s	P


Uab三相预期波

示波图号:3307644-001



U=426.8V

I=25,441.55A/ip=51,886.85A

cos φ=0.24

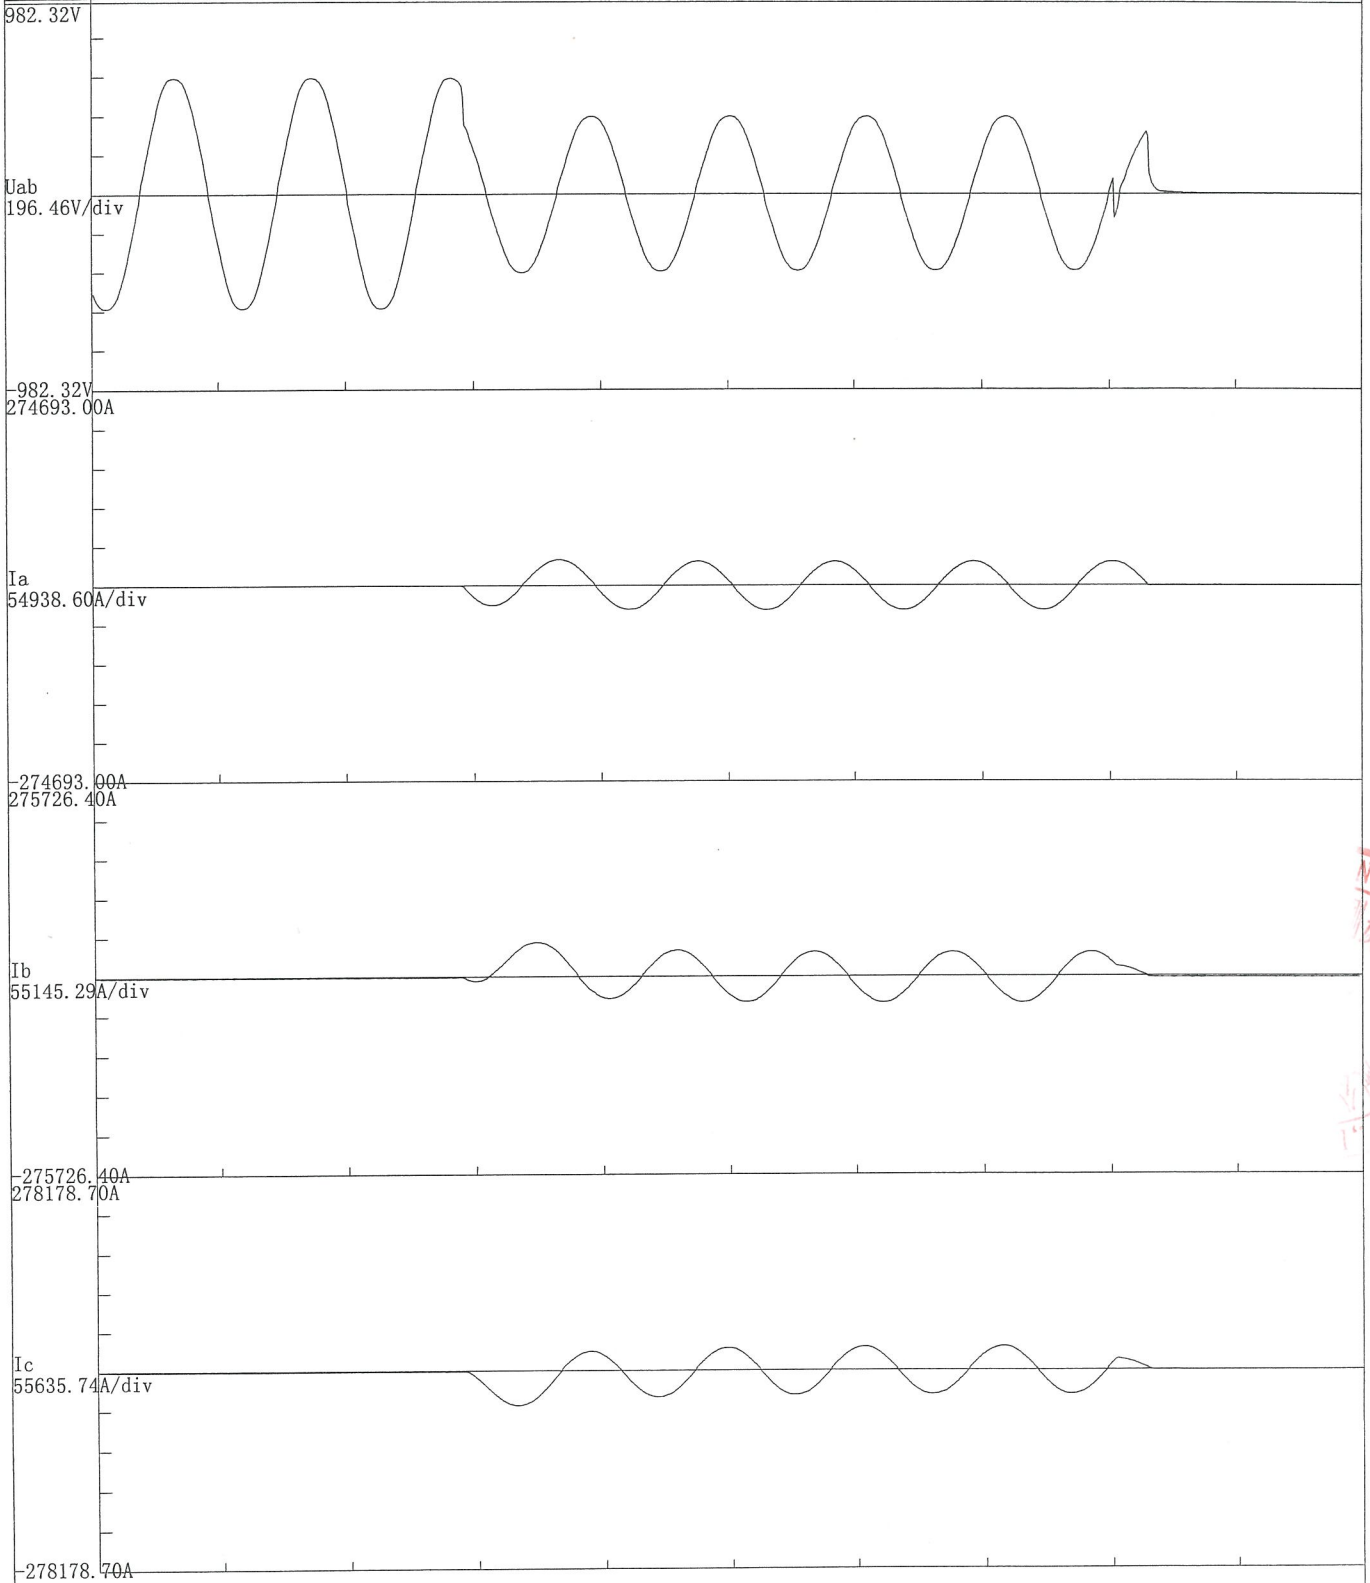

18.43ms/div

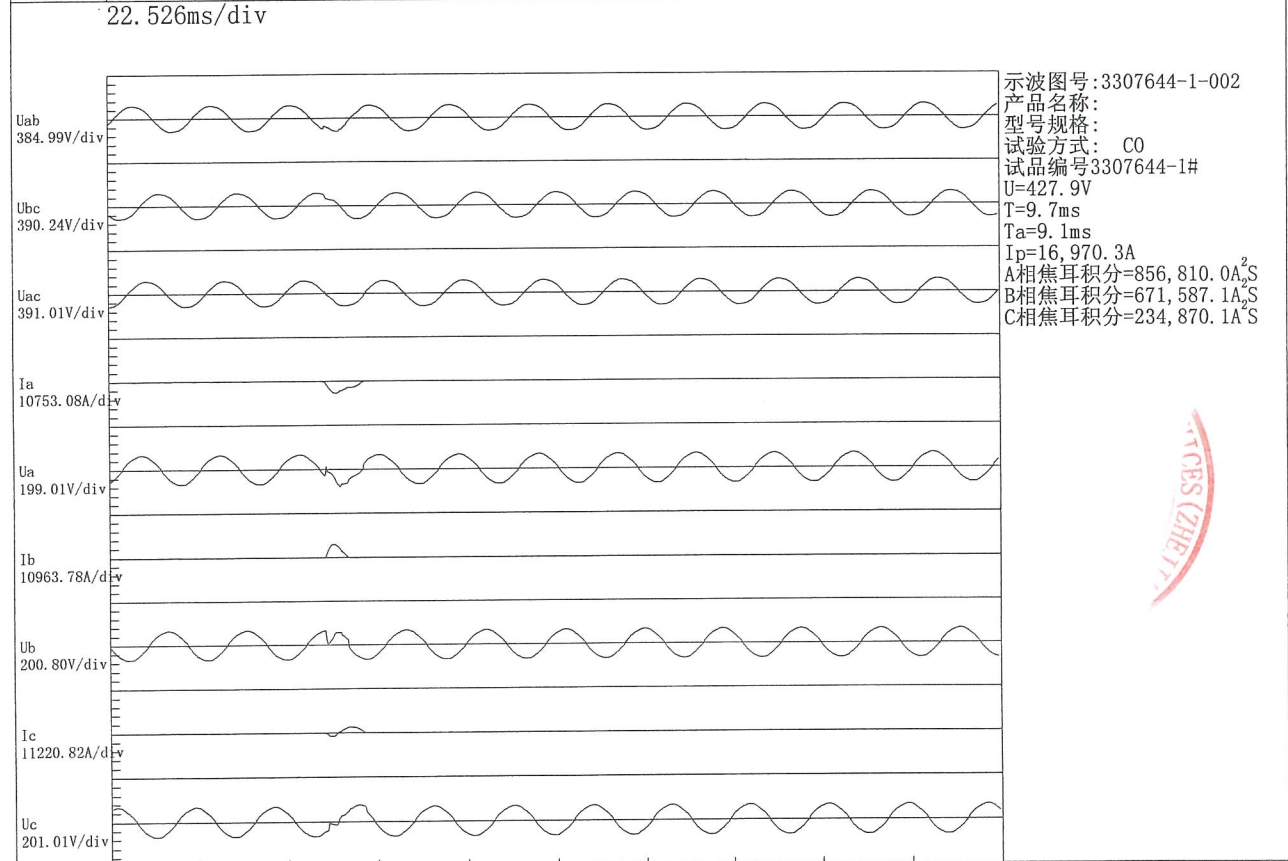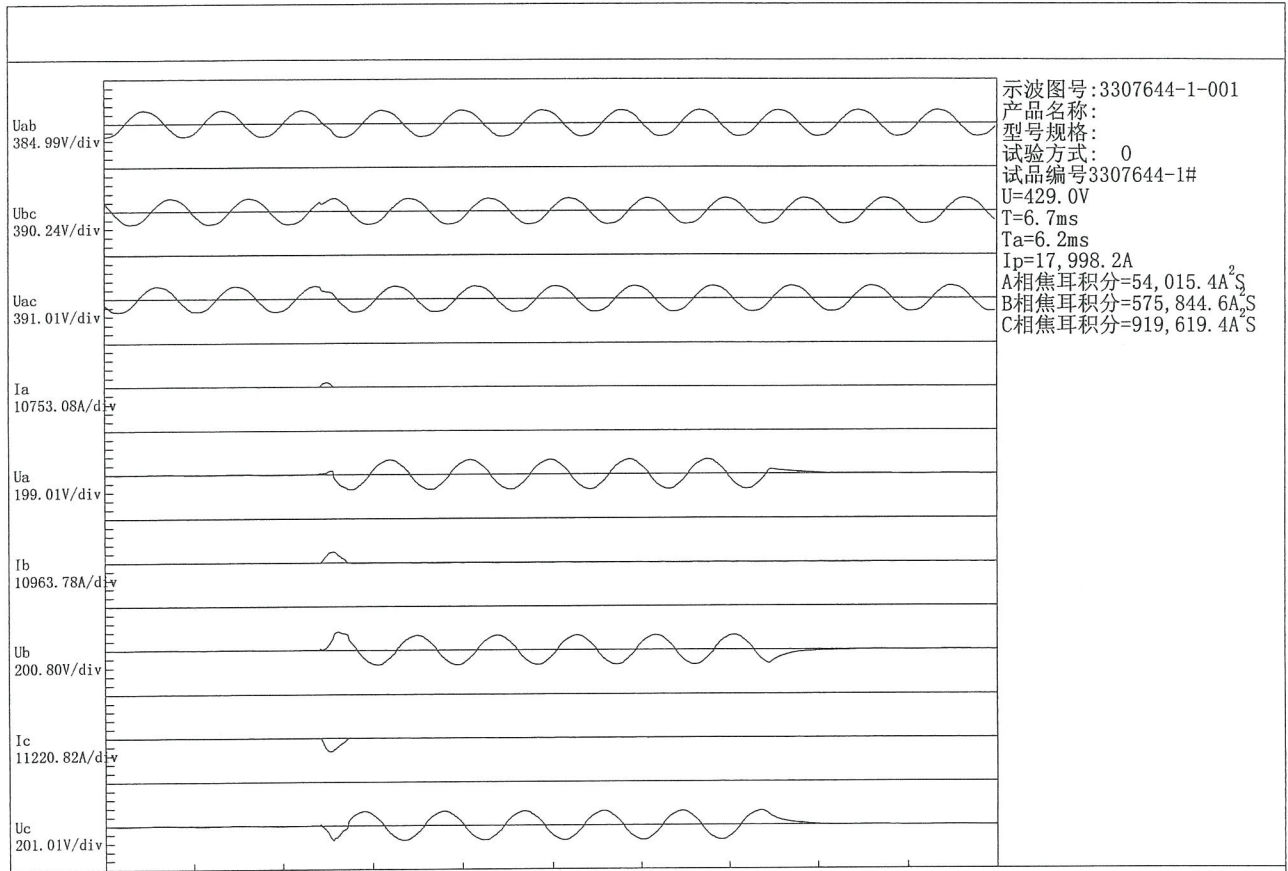

LANG CHUI

ATCES (ZHBT)