


Панельная антенна PheeNet ANT24-013PN-D

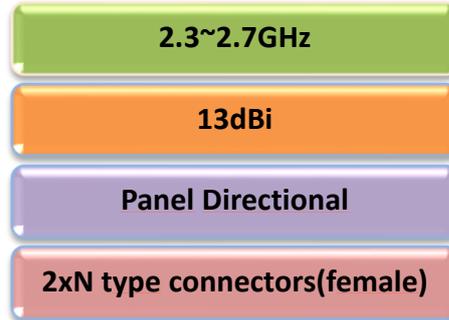


PheeNet ANT24-013PN-D - панельная (Panel) антенна с двойной поляризацией и коэффициентом усиления 13dBi. Антенна ANT24-013PN-D совместима со всеми точками доступа 2T2R MIMO, работающими в диапазоне частот 2.4GHz, имеет два N-типе коннектора (female) и комплект для настенной установки.

Направленные антенны применяются для соединения двух и более точек доступа или организации беспроводных мостов между двумя (PTP) или более (PTMP) узлами сети.


H-PLANE (port 1)

Gain Total

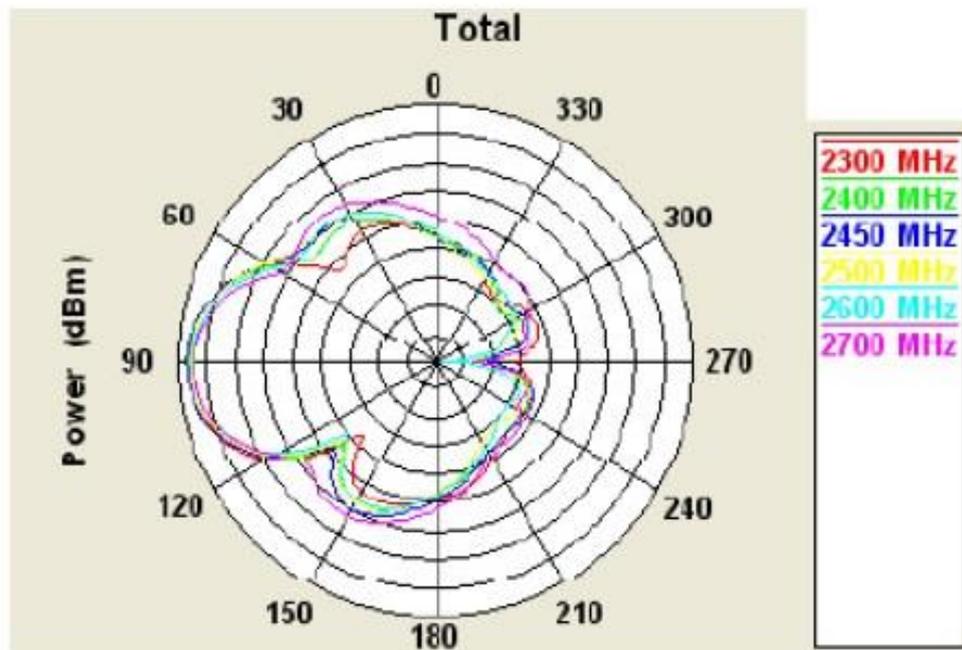


H-PLANE (port 2)


Gain Total

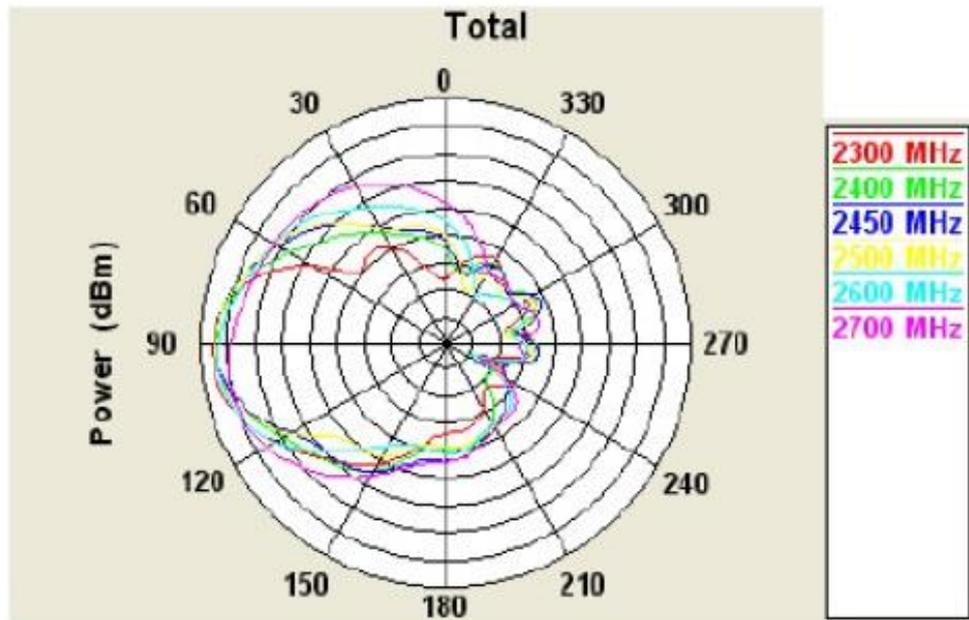


RETURN LOSS (port 1)

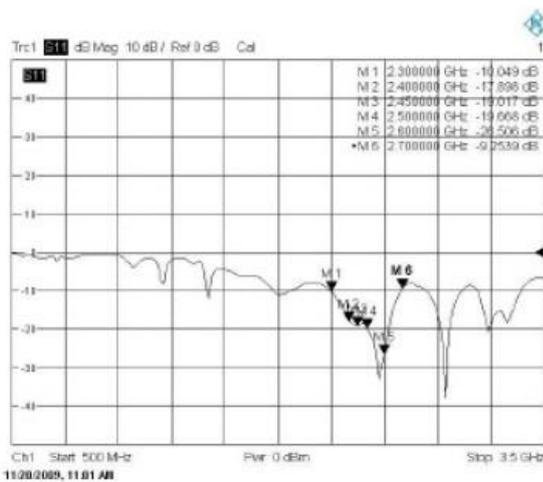


RETURN LOSS (port 2)

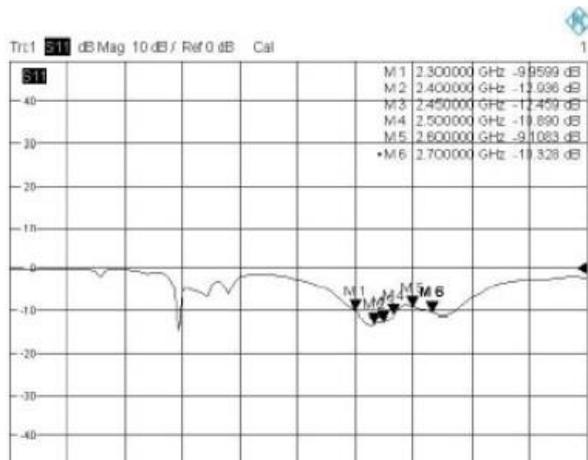

VSWR (port 1)

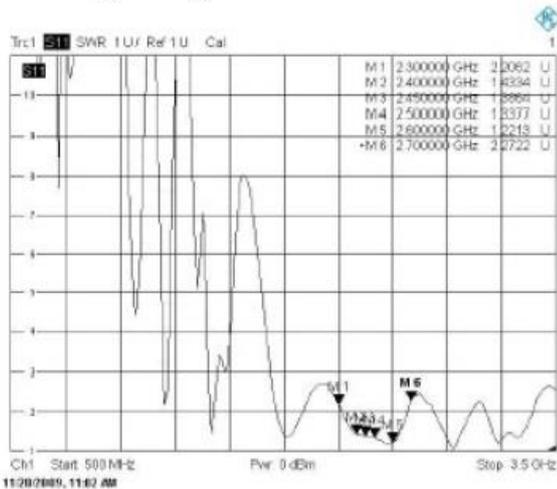

VSWR (port 2)

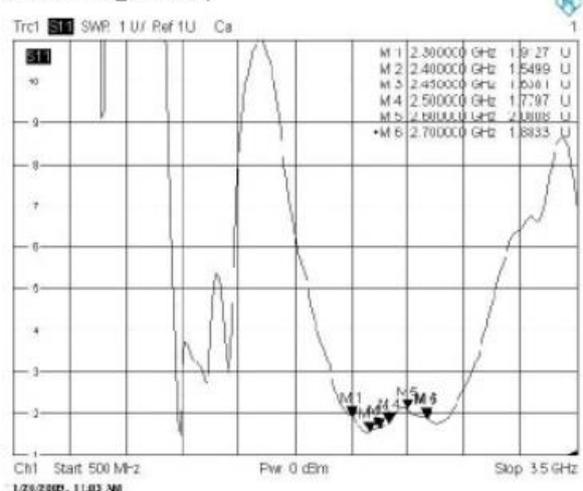

Технические характеристики PheeNet ANT24-013PN-D

Electrical Specification	
Frequency	2.3~2.7GHz
Type	Panel Directional
Polarization	Dual polarization
Gain	13dBi
VSWR	≤2.0
Beam Width	Vertical Polarization:H-Plane 13.21° / E-Plane 13.21°
	Horizontal Polarization:H-Plane 11.79° / E-Plane 11.79°
Impedance	50Ω ± 5Ω
Connector Type	2 N Type (Female)
Environmental & Mechanical Characteristics	
Temperature	-30 to 60 C
Material	Mount: Plating Zinc Iron Plate Radome: ABS
Dimensions	256*227*19 mm
Weight	435g ± 20g